


# ATTACHMENT 1

Project Name: Improvements on South Columbia Street (NC 86) between Cameron Avenue and Franklin Street in Chapel Hill.

Scope of the Project: Mill and resurface, replace the existing curb and gutter, reconstruct driveways, install storm drainage, reconstruct brick sidewalk at several locations, and relocate the existing traffic signal and crosswalk on NC 86 (South Columbia Street).

Estimated Cost: \$245,000

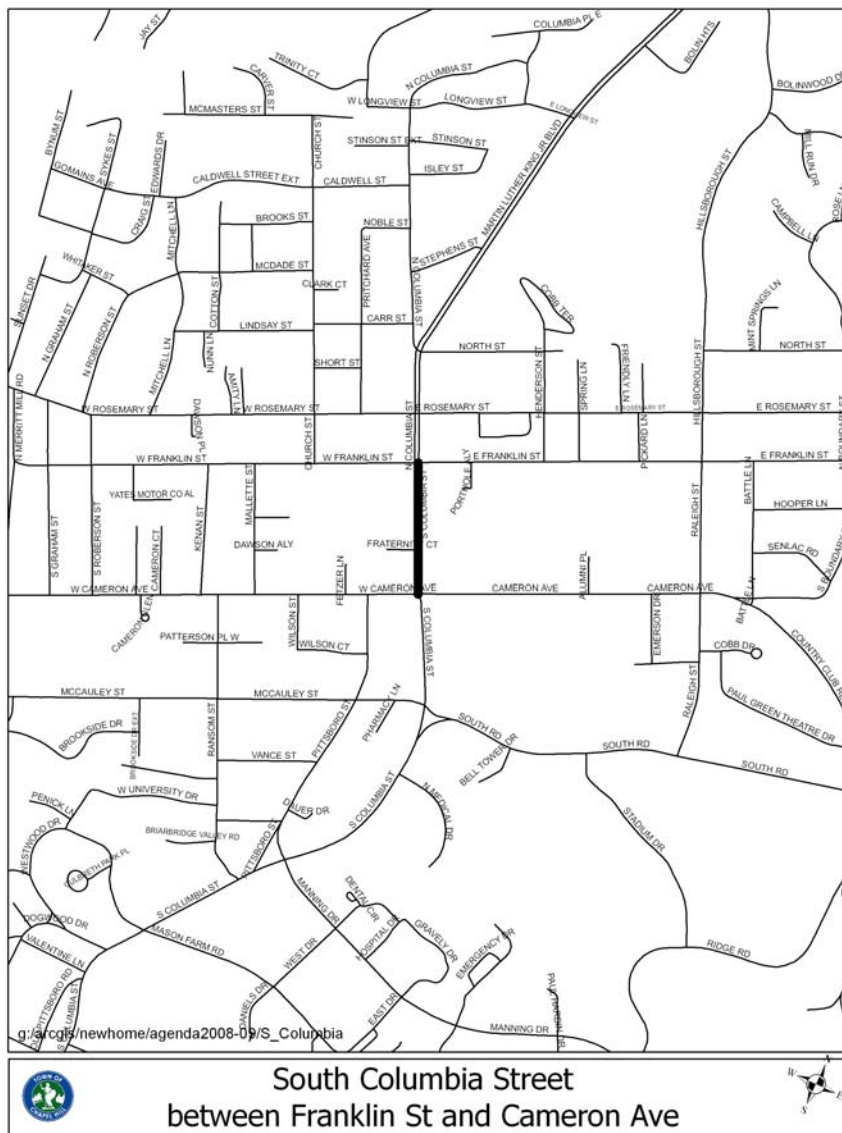






Project Name: Bus stop and street improvements on Raleigh Road (NC 54), South Road, and Pittsboro Street (NC 86) in Chapel Hill.

Scope of the Project: On Raleigh Road at Glen Lennox Neighborhood: Replace 300 linear feet of deteriorated curb and gutter with reinforced curb and gutter, replace 300 linear feet of sidewalk, and reconstruct pavement in the bus travel lane.

On South Road at Fetzer Gym: Replace 100 linear feet of deteriorated curb and gutter with reinforced curb and gutter, and reconstruct pavement in the bus travel lane.

On Pittsboro Street at Credit Union: Replace 77 linear feet of deteriorated curb and gutter with reinforced curb and gutter, and reconstruct pavement in the bus travel lane.


Estimated Cost: \$82,500 (includes \$11,800 of sidewalk on Raleigh Road)

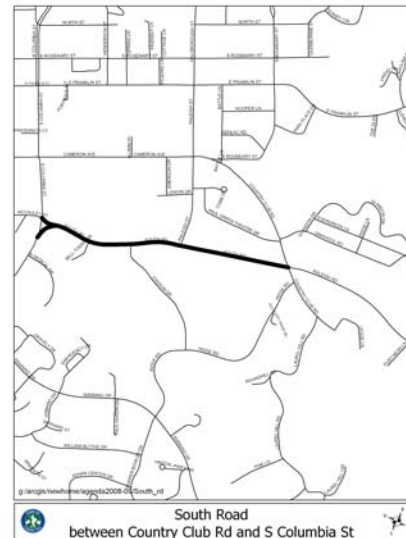

Project Name: Construct bus pull-offs on both sides of Fordham Boulevard (US 15/501) AT Old Mason Farm Road.

Scope of the Project: Install bus-pull offs on both sides of Fordham Blvd; Install 100 linear feet of curb and gutter, install 100 linear feet sidewalk on both sides to connect to the existing crosswalk signal at Fordham Blvd and Old Mason Farm Rd; install required drainage structures.

Estimated Cost: \$145,000

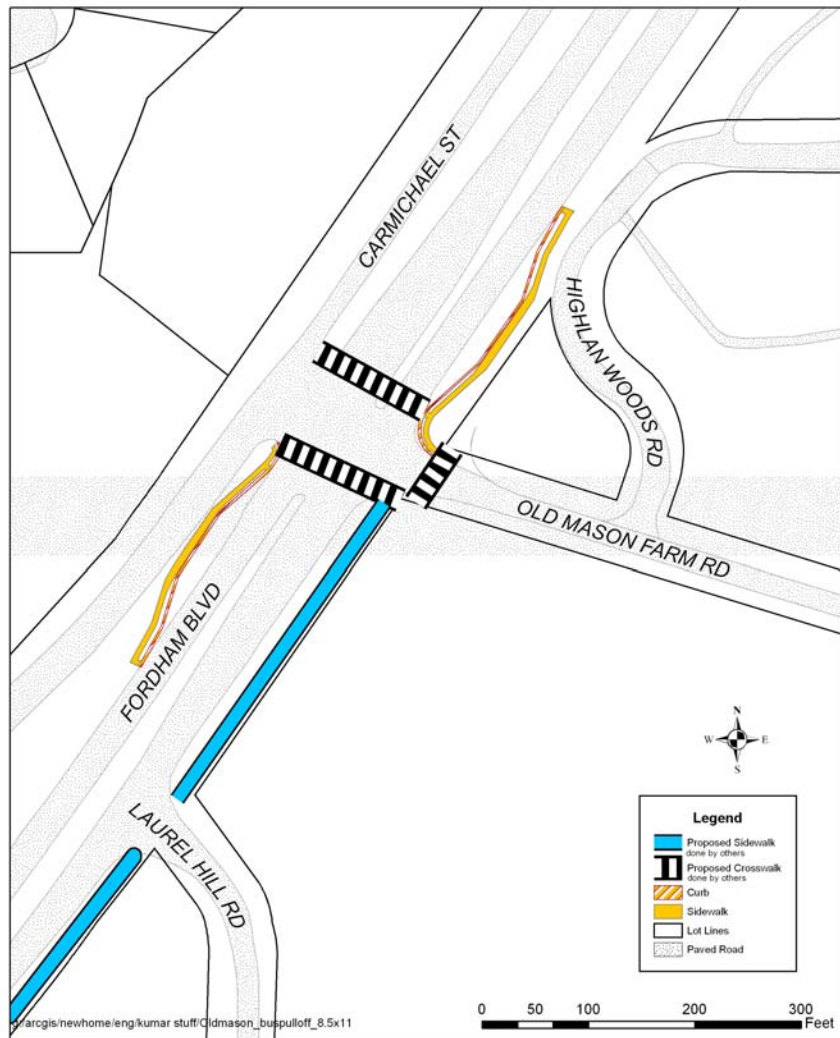

Proposed Bus Pulloffs for Fordham Blvd. at Old Mason Farm Rd and Christopher Rd