




# 2003 MUTCD Standard In-Street Pedestrian Crosswalk Sign

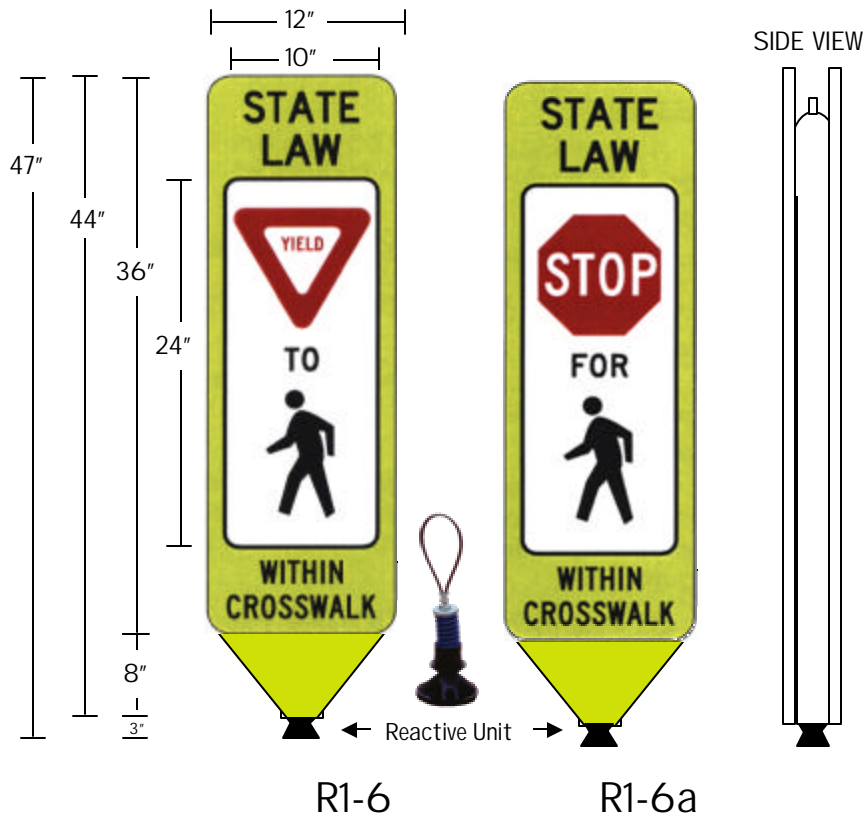

12"x 44" Fluorescent Yellow  
Green Diamond Grade  
Reflective Sheeting  
with  
10"x 24 White Hi Intensity  
Sheeting Insert.

White Post and Panel

Overall height of unit is 47"

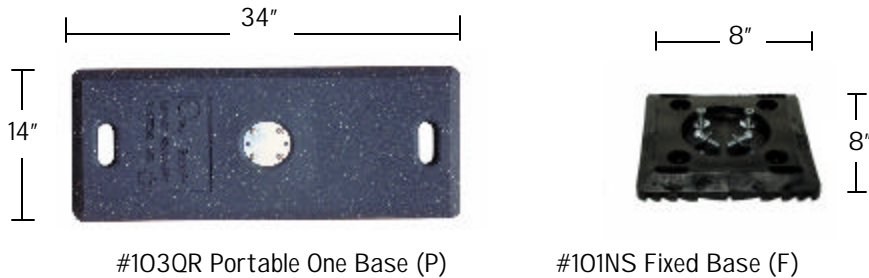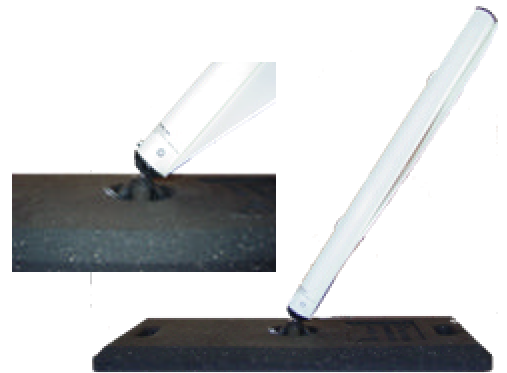

This product can be used  
with either the  
#103QR Portable Base (P)  
or  
#101NS Fixed Base (F)

## SPECIFICATIONS

- Post and panel are constructed of flexible polyethylene plastic that is resistant to: ultraviolet light, ozone, and hydrocarbons.
- Double Paneled Unit has a reactive spring assembly tested at 200 lb tension with stainless steel cable.
- Sign shall have an "anti-twist" feature which prevents the sign from being twisted sideways
- Sign shall have a "Quick Release" feature which allows the sign to be removed from the base without the use of tools.
- NCHRP-350 Approved

## RECOMMENDED USES

- Ideal for delineating crosswalks to reduce the risk of injury, death, and property damage.

August 2004

**IMPACT**recovery  
SYSTEMS

"Impacting Today's Roads for a Safer Tomorrow"

246 W. Josephine  
San Antonio, TX 78212  
(210) 736-4477 (210) 734-6448  
Toll Free: (800) 736-5256  
[www.impactrecovery.com](http://www.impactrecovery.com)